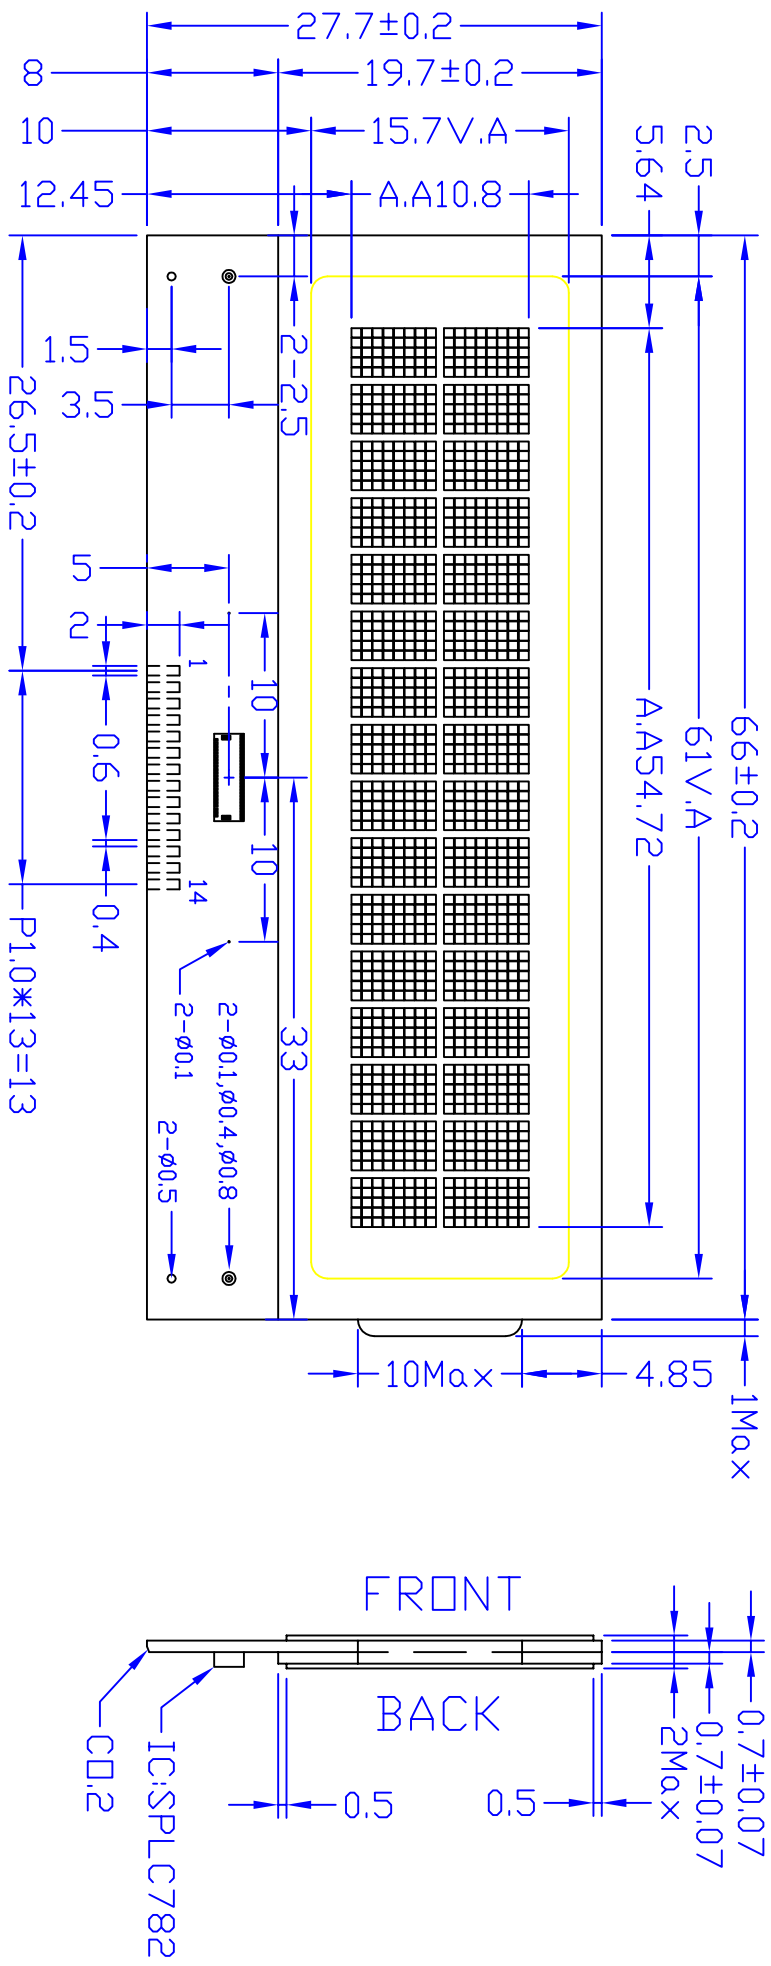


REV.	DESCRIPTION OF MODIFY	DATE



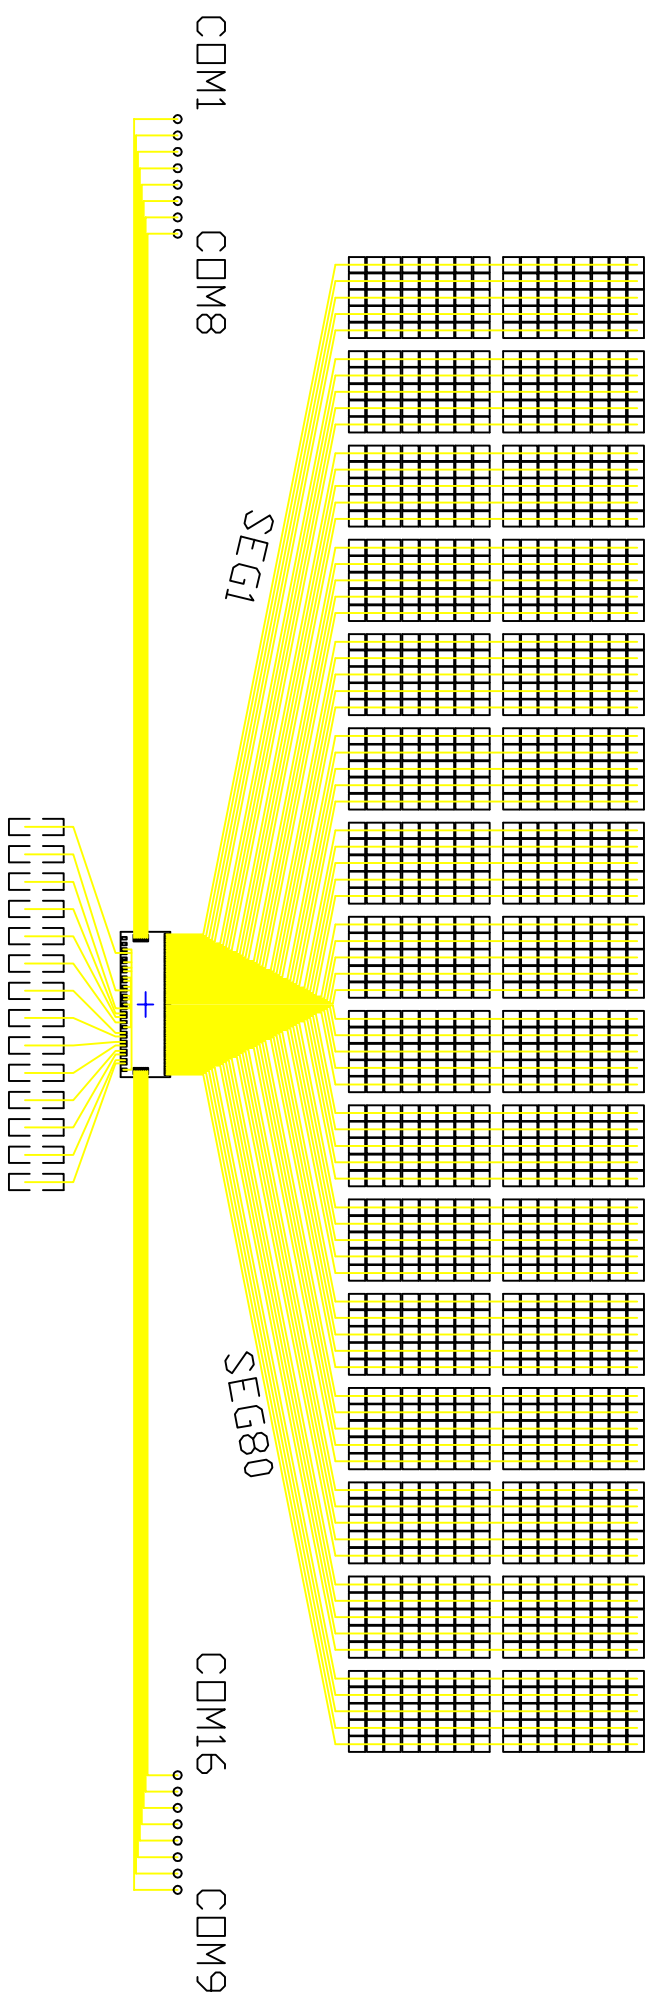
SPECIFICATIONS

DISPLAY MODE : STN, YELLOW/GREEN, POSITIVE MODE
 DRIVE CONDITION : 1/16 DUTY , 1/4 BIAS
 VIEWING DIRECTION : 12'CLOCK
 OPERATING TEMP : -20°C TO +70°C
 STORAGE TEMP : -30°C TO +80°C
 OPERATING VOLTAGE: 3.3V(FOR REFERENCE VOLTAGE)
 BACK POLARIZER : RELECTIVE
 FRAME FREQUENCY: 64 HZ
 CONNECTORS : COG




PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
Symbol	VSS	VDD	V0	RS	Rw	E	DB0~DB7	CS	RES	Vee	NC	A	K

DRAWN BY :		 WINCOM TECH CO.,LTD	 UNITS: MM
CHECKED BY :			
TEL: (0755)26154265		DWG NO. : COG1602A	REV: SHEET:
FAX: (0755)83308659			
jjangyao@wincomlcd.com			

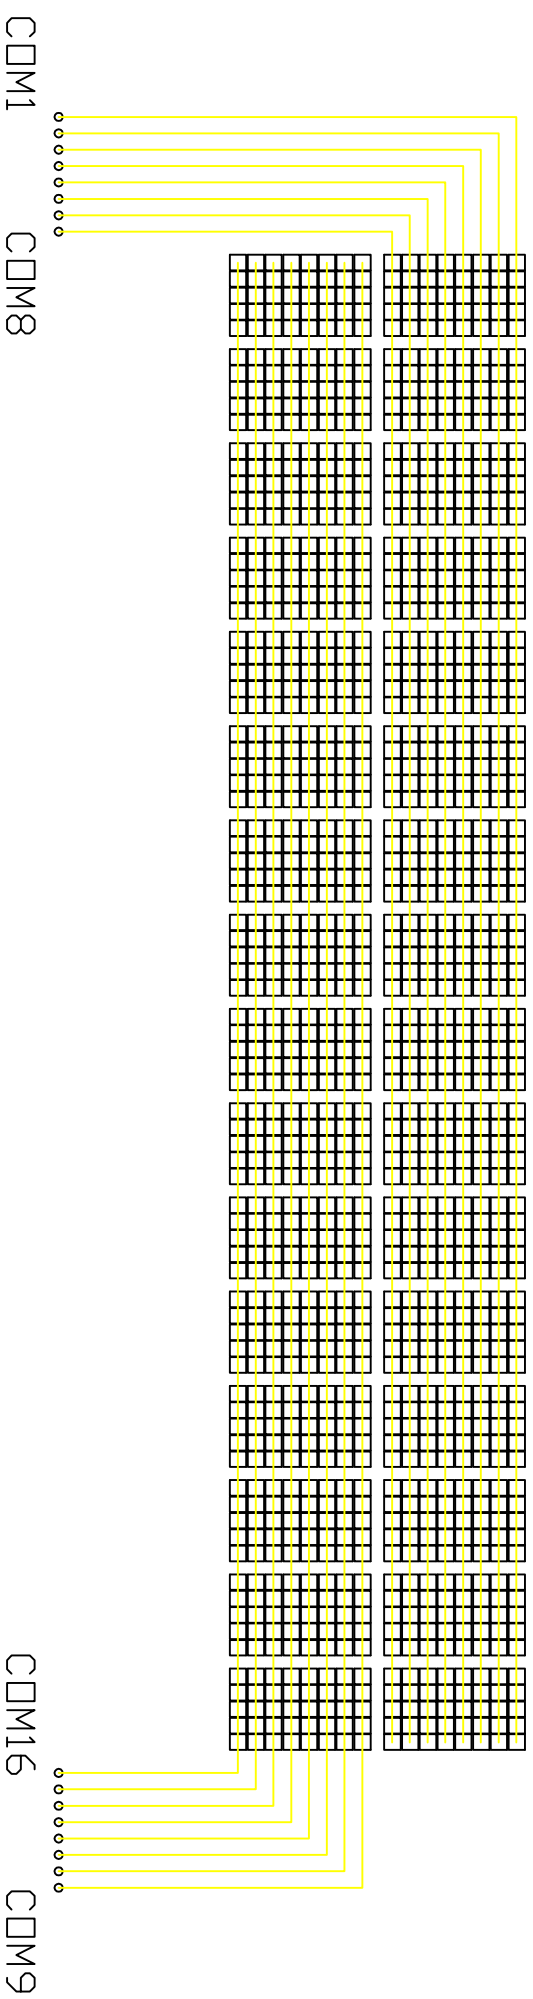
REV.	DESCRIPTION OF MODIFY	DATE





SEGMENT
 接触面的反面
 (INDIUM SIDE)

DRAWN BY :		 WINCOM TECH CO.,LTD		 
CHECKED BY :				
TEL: (0755)26154265		TITL		
FAX: (0755)83308659		REV:	SHEET:	
jiangyao@wincomlcd.com		SIZE:	SCALE:	
DWG NO.: COG1602A				

REV.	DESCRIPTION OF MODIFY	DATE



DRAWN BY :		 WINCOM TECH CO.,LTD			
CHECKED BY :				UNITS	MM
TEL: (0755)26154265				TITL	
FAX: (0755)83308659		REV:	SHEET:	SCALE:	
jiangyao@wincomlcd.com		DWG NO. : COG1602A	REV:	SCALE:	
		SIZE:			