



WINCOM TECH
盈达顺科技

Wincom Tech CO., LTD.

The Light Specialist

CONTACT ADDRESS: 6F, Block 105, Jing Di Industrial Park,
Fu Qiang Rd. Fu Tian, Shenzhen City, China.

Tel: 0086-755-83308729

Fax: 0086-755-83308659

E-mail: craig.jiang@wincomlcd.com



PART NO. : **WL-MR16-3W-38-PW-001**

Customer : _____

CONTENTS

<i>NO.</i>	<i>ITEM</i>	<i>PAGE</i>
1.	<i>Cover</i>	1
2.	<i>Record of revision</i>	2
3.	<i>Features</i>	3
4.	<i>Typical applications</i>	3
5.	<i>Mechanical spec</i>	4
6.	<i>Environmental ratings</i>	4
7.	<i>Electrical characteristics</i>	4
8.	<i>Optical characteristics</i>	4
9.	<i>Luminance Distribution</i>	5
10	<i>Outline dimension</i>	5

ACCEPTED BY:

PROPOSED BY:

RECORD OF REVISION

DATE	PAGE	SUMMARY
2010-10-13	---	New issue

3.Features

- Light source: 3 x 1W high efficiency LED
- CCT(TYPE): Pure White (6300K)
- LED source life: More than 50,000 hours
- Low heat, Body Temperature 55℃ @Environmental T=25℃
- No UV or IR light radiation
- Sleek designed heat fins with excellent thermal efficiency
- 3W MR16 can achieve directional light output equal to 30W halogen lamp yet consume 80% less power
- Reverse polarity protection
- Safety Standard: RoHS
- Works with 12V AC/DC lighting systems



4. Typical Applications

- Landscape Accent/Spot lighting
- Architectural Lighting
- Display Case Accent
- Artwork Lighting
- Mood Lighting/General lighting
- Amusement Park Accent

5. Mechanical spec

<i>I T E M</i>	<i>Specifications</i>	<i>COMMENT</i>
Outer Dimension	Φ50mm × 54mm	---
Housing material	Aluminum with silver paint finish	---
Base type	GX5.3 Compatible base	---
Weight	About 38g	---

6. Environmental ratings

<i>I T E M</i>	<i>OPERATING</i>		<i>STORAGE</i>		<i>COMMENT</i>
	<i>MIN.</i>	<i>MAX.</i>	<i>MIN.</i>	<i>MAX.</i>	
AMBIENT TEMPERATURE	-20℃	40℃	-30℃	80℃	-----
HUMIDITY	0~90%		0~90%		NON CONDENSATION

7. Electrical characteristics

Ta = 25℃, Humidity: 50%Rh non condensed



<i>I T E M</i>	<i>SYMBOL</i>	<i>CONDITION</i>	<i>MIN.</i>	<i>TYP.</i>	<i>MAX.</i>	<i>UNIT</i>
Power supply voltage for circuit	U	AC/DC	11.3	12	16	v
Operation current	I	12V DC	220	250	280	mA
Typical Power Consumption	P	12V AC/DC	2.5	3	3.3	W
Circuit Efficiency	η	12V DC	---	91	---	%

8. Optical characteristics

Ta = 25℃, Humidity: 50%Rh non condensed

<i>I T E M</i>	<i>SYMBOL</i>	<i>CONDITION</i>	<i>MIN.</i>	<i>TYP.</i>	<i>MAX.</i>	<i>UNIT</i>
Beam Angle Flood Light	θ	---	35	38	40	deg.
Luminous Flux	Φ	P=3W	200	240	330	lm
CRI	---	P=3W	70	75	---	---
CCT	---	P=3W	5800	6300	6800	K
Center Luminance	NOTE1	P=3W,D.A=1m	520	611	700	LUX
B/A	NOTE1	θ=38°	---	0.69	---	---

NOTE1:

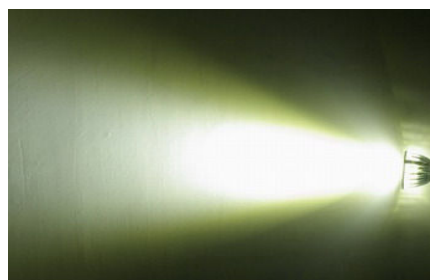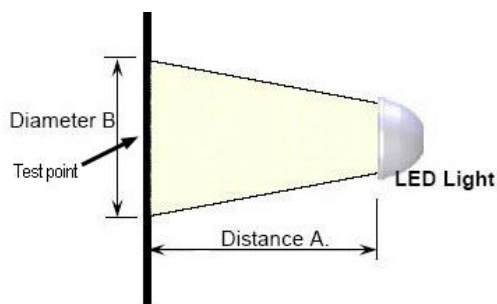

9. Luminance Distribution:

Unit:LUX

	1	2	3	4	5	6	7	8	9	10	11
1	---	---	---	---	37	45	37	---	---	---	---
2	---	---	---	---	65	90	70	---	---	---	---
3	---	---	---	---	200	231	195	---	---	---	---
4	---	---	---	---	370	430	360	---	---	---	---
5	32	65	192	368	516	570	510	358	186	67	35
6	38	83	228	411	555	611	556	418	224	86	39
7	33	67	190	364	517	550	495	356	177	66	34
8	---	---	---	---	368	427	350	---	---	---	---
9	---	---	---	---	185	214	190	---	---	---	---
10	---	---	---	---	63	80	65	---	---	---	---
11	---	---	---	---	35	43	33	---	---	---	---

NOTE:

The test sample was positioned 1.0m perpendicular to horizontal surface, measurements were taken on every 10cm×10cm spot, P=3W.

Tolerance is 10% unless otherwise noted.

10. Outline dimension

